


DATE	
REVISIONS	
COMMENTS	

JULY 2010

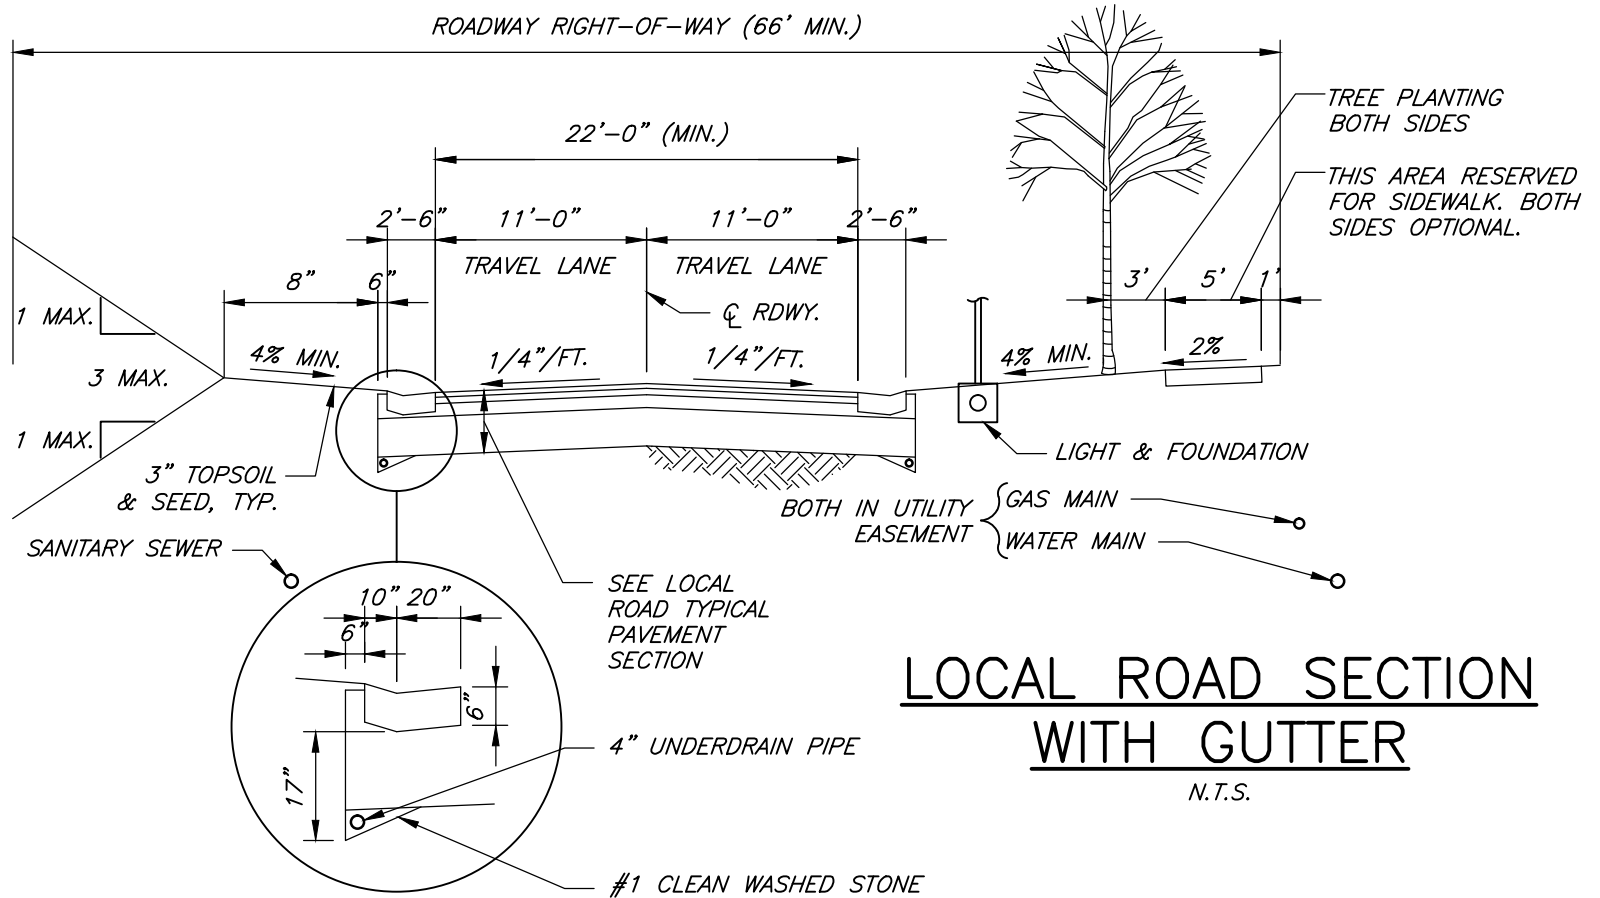

## LOCAL ROAD SECTION WITH GUTTER

N.T.S.

**NOTES:**

1. SUBBASE COURSE SHALL BE COMPACTED IN ACCORDANCE WITH THE REQUIREMENTS OF NYSDOT STANDARD SPECIFICATION SECTION 304.
2. ALL TOPSOIL, STUMPS, ROOTS, OR OTHER ORGANIC MATERIAL TO BE REMOVED PRIOR TO PLACING FILL OR SHAPING ROAD BOX.
3. CONSTRUCTION SEASON FOR ROAD CONSTRUCTION SHALL BE FROM MAY 15th TO OCTOBER 15th.
4. GUTTER CURING AGENT SHALL BE APPLIED THE SAME DAY THAT THE GUTTERS ARE CONSTRUCTED PER THE MANUFACTURERS SPECIFICATIONS.
5. UTILITIES SUCH AS GAS, WATER MAIN, TELEPHONE, AND SANITARY SHALL BE SHOWN ON THE TYPICAL ROAD SECTION.
6. ALL UNPAVED AREAS WITHIN THE RIGHT-OF-WAY ARE TO BE TOPSOILED, FERTILIZED, AND SEEDED.
7. CONCRETE FOR GUTTER SHALL MEET THE REQUIREMENTS OF NYSDOT STANDARD SPECIFICATIONS SECTION 501 CLASS A FOR CONVENTIONALLY FORMED GUTTER OR CLASS 1 FOR MACHINE FORMED GUTTER. CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF NYSDOT STANDARD SPECIFICATIONS SECTION 624.

DRAWING HS-03	LOCAL ROAD WITH GUTTER	HIGHWAY & STORM SEWER DETAILS	TOWN OF BATAVIA
---------------	------------------------	-------------------------------	-----------------